

1064nm 300mW In-Line Optical Isolator

Kerns Technology | www.kernsoptic.com | Email: jenny@kernsoptic.com

Product Overview

In-line optical isolator for 1064 nm communication, sensing, test and product-development systems. Single-stage and dual-stage versions are listed in the KernsTech master catalog.

Features	Applications
Low insertion loss; High return loss; High extinction ratio; High isolation; High stability and reliability	Communication systems; Test instruments; Fiber sensing; Product R&D


Technical Specifications

Parameter	Specification	Unit
Grade	Single / Dual	-
Center Wavelength	1064	nm
Operating Wavelength Range	±5	nm
Typical Peak Isolation @ 23°C	35 / 52	dB
Min. Isolation @ 23°C	30 / 45	dB
Typical Insertion Loss @ 23°C	1.5 / 2.4	dB
Max. Insertion Loss @ 23°C	1.8 / 3.2	dB
Min. Return Loss (Input / Output)	50 / 50	dB
Min. Extinction Ratio - Both Axis Working	20	dB
Min. Extinction Ratio - Fast Axis Blocked	22	dB
Max. PDL (SM fiber)	0.15	dB
Max. Optical Power (CW)	300	mW
Max. Tensile Load	5	N
Fiber Type	PM Panda fiber or single-mode fiber	-
Operating Temperature	-5 to +50	°C
Storage Temperature	-40 to +85	°C
Package Dimensions	dia. 5.5 x 35	mm

For configuration selection and quotation, use the Component Finder at www.kernsoptic.com/contacts. Final special configurations are subject to engineering review.

Single / Dual values are shown in the same order. With connectors, IL increases by 0.3 dB, RL decreases by 5 dB and ER decreases by 2 dB.

Package Dimensions

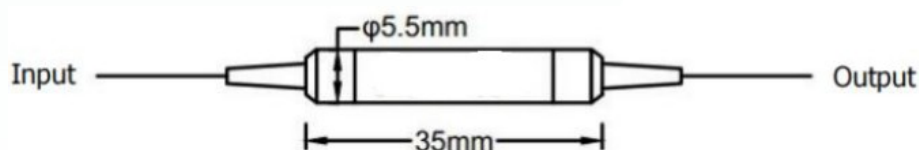

Mechanical drawing from the KernsTech master catalog.