

TECHNICAL DATASHEET

Mini Size PM PBS/PBC

Product family	Mini & Hybrid
Key selection	PM / PBS/PBC

Technical Specifications

Parameter	-	Unit	Specification	-
Center Wavelength	-	nm	1550,1310	1064
Operating Wavelength Range	-	nm	±40	±20
Typical Insertion Loss @ 23°C	-	dB	0.5	0.7
Maximum Insertion Loss @ 23°C	-	dB	0.7	0.9
Minimum Extinction Ratio @ 23°C	-	dB	20	-
Minimum Directivity	-	dB	50	-
Minimum Return Loss	-	dB	50	-
Maximum Power (CW)	-	mW	300	-
Maximum Tensile Load	-	N	5	-
Fiber Type	Port1&2	-	PM Panda fiber	-
-	Port 3	-	SM fiber or PM Panda fiber	-
Package Dimensions	-	mm	dia. 3.2x30	-
Operating Temperature	-	°C	-5 to +70	-
Storage Temperature	-	°C	-40 to +85	-

Configuration Notes


Available wavelength, optical power, fiber, connector, pigtail and package options depend on the selected product configuration. Please include the target application and quantity with your RFQ. Final ordering details are confirmed in the quotation.

www.kernsoptic.com | jenny@kernsoptic.com

Package Dimensions

Mini Size PM PBS/PBC

Package reference: Dia. 3.2x30

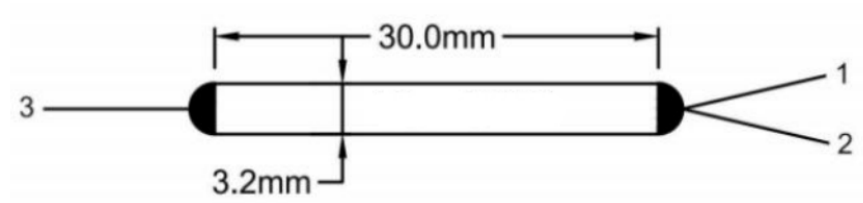

Dimensions are shown in millimetres unless otherwise indicated. Final package, pigtail and connector configuration should be confirmed in the quotation.