

TECHNICAL DATASHEET

All-Band Fused Fiber Coupler AWFC

Product family	Couplers & Polarization
Key selection	Fiber Optic Component

Technical Specifications

Parameter	-	Unit	Specification	-
Operating Wavelength	-	nm	1260 to 1620	-
Typical Excess Loss	-	dB	0.07	0.10
Coupling Ratio	50/50	□	≤3.8	≤4.0
-	40/60	□	≤5.1/3.1	≤5.3/3.3
-	30/70	□	≤6.4/2.3	≤6.7/2.5
-	25/75	□	6.5/1.7	≤7.0/1.9
-	20/80	□	≤8.3/1.6	≤8.8/1.8
-	15/85	□	≤8.5/1.2	≤9.2/1.4
-	10/90	□	≤11.5/1.05	≤12.2/1.2
-	5/95	□	≤14.6/0.8	≤15.5/0.9
-	2/98	□	≤18.8/0.7	≤19.5/0.8
-	1/99	□	≤22.5/0.65	≤23.5/0.75
Polarization Dependent Loss	-	dB	≤0.15	≤0.20
Directivity	-	dB	≥55	-
Operating Temperature	-	°C	40 to +85	-


Configuration Notes

Available wavelength, optical power, fiber, connector, pigtail and package options depend on the selected product configuration. Please include the target application and quantity with your RFQ. Final ordering details are confirmed in the quotation.

www.kernsoptic.com | jenny@kernsoptic.com

Package Dimensions

All-Band Fused Fiber Coupler AWFC

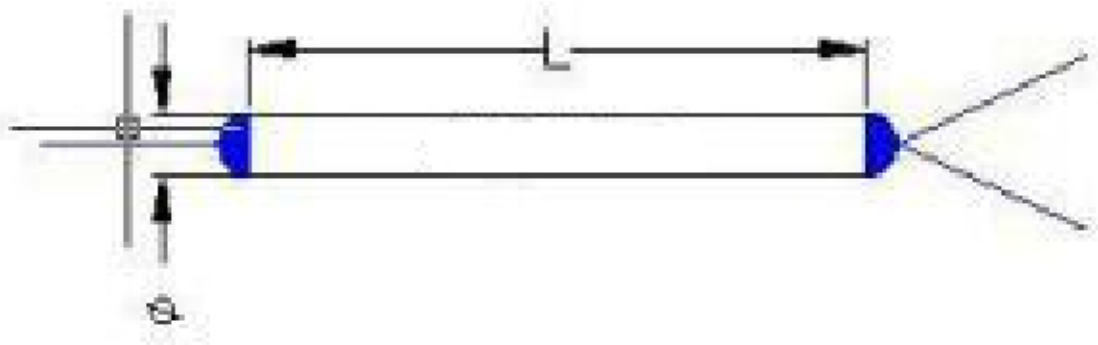

Dimensions are shown in millimetres unless otherwise indicated. Final package, pigtail and connector configuration should be confirmed in the quotation.