

TECHNICAL DATASHEET

PM In-Line Fiber Optic Attenuator IFOA

Product family	Couplers & Polarization
Key selection	PM

Technical Specifications

Parameter	Unit	Specification	-	-
Operating Wavelength	nm	1550,1310,980,10641030	-	-
Bandwidth	nm	±15	-	-
Typical Excess Loss	dB	1,3,6,10,15,20orother	-	-
Attenuation Accuracy	dB	±10% attenuation value	-	-
Extinction Ratio	dB	18	-	-
Operating Temperature	°C	-20 to +75	-	-
Storage Temperature	°C	-40 to +85	-	-
Fiber Length	m	1m,otheronrequest	-	-
Fiber Type	-	PMFiber	-	-
Pigtail Type	-	250umbarefiber	900umloosetube	900um/2mm/3mmloosetube
Package Dimensions (dia. x L)	mm	dia. 3.0xL54	dia. 3.0xL54	L90xW20xH9.5

Configuration Notes


Available wavelength, optical power, fiber, connector, pigtail and package options depend on the selected product configuration. Please include the target application and quantity with your RFQ. Final ordering details are confirmed in the quotation.

www.kernsoptic.com | jenny@kernsoptic.com

Package Dimensions

PM In-Line Fiber Optic Attenuator IFOA

Package reference: 90x20x9.5

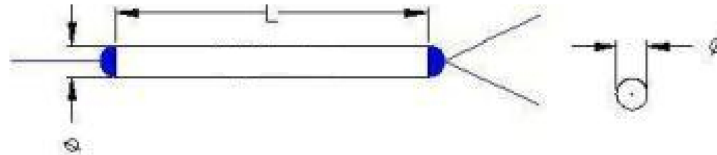

Dimensions are shown in millimetres unless otherwise indicated. Final package, pigtail and connector configuration should be confirmed in the quotation.