

TECHNICAL DATASHEET

1310-1550nm PM Faraday Mirror

Product family	Mini & Hybrid
Key selection	1310-1550nm / PM

Technical Specifications

Parameter	Unit	Specification
Center Wavelength	nm	1550,1480,1310
Operating Wavelength Bandwidth	nm	±15
Maximum Insertion Loss	dB	0.5
Minimum Extinction Ratio @ 23°C	dB	20
Maximum PMD	ps	0.05
Maximum Power (CW)	mW	300
Maximum Tensile Load	N	5
Fiber Type	-	PM Panda Fiber
Operating Temperature	°C	-5 to +70
Storage Temperature	°C	-40 to +85


Configuration Notes

Available wavelength, optical power, fiber, connector, pigtail and package options depend on the selected product configuration. Please include the target application and quantity with your RFQ. Final ordering details are confirmed in the quotation.

www.kernsoptic.com | jenny@kernsoptic.com

Package Dimensions

1310-1550nm PM Faraday Mirror

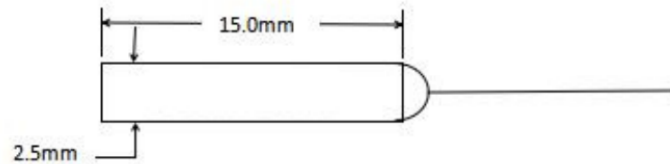

Dimensions are shown in millimetres unless otherwise indicated. Final package, pigtail and connector configuration should be confirmed in the quotation.