

TECHNICAL DATASHEET

1310-1550nm High Power PM Optical Circulator

Product family	Optical Circulators
Key selection	1310-1550nm / PM

Technical Specifications

Parameter	Unit	Specification	-	-	-
Type	-	Type A	-	Type B	-
Port Type	-	3 Port	-	-	-
Center Wavelength	nm	1550,1480,1310	-	-	-
Operating Wavelength Range	nm	±20	-	-	-
Typical Insertion Loss @ 23°C	dB	0.7	1.1	0.6	1.0
Maximum Insertion Loss @ 23°C	dB	0.9	1.3	0.8	1.2
Typical Peak Isolation @ 23°C	dB	46	-	30	-
Minimum Isolation @ 23°C	dB	40	-	20	-
Minimum Crosstalk	dB	50	-	-	-
Minimum Return Loss	dB	50	-	-	-
Package Dimensions	mm	2.5x25	-	-	-
Maximum Tensile Load	N	5	-	-	-
Working Axis	-	Slow axis operating; fast axis blocked	-	-	-
Operating Temperature	°C	-5 to +70	-	-	-
Storage Temperature	°C	-40 to +85	-	-	-

Configuration Notes


Available wavelength, optical power, fiber, connector, pigtail and package options depend on the selected product configuration. Please include the target application and quantity with your RFQ. Final ordering details are confirmed in the quotation.

www.kernsoptic.com | jenny@kernsoptic.com

Package Dimensions

1310-1550nm High Power PM Optical Circulator

Package reference: 2.5x25 / Dia. 2.5x25

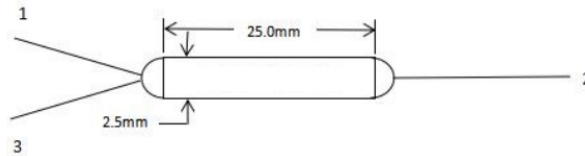

Dimensions are shown in millimetres unless otherwise indicated. Final package, pigtail and connector configuration should be confirmed in the quotation.